

## Introducing the Autobag® 500™ Bagging System – The new flagship in bag packaging machinery optimizes reliability, flexibility and ergonomics

The Autobag® 500™ bagger is a technologically-advanced, automatic filling and sealing machine designed for reliability, flexibility and optimizing packaging throughput. Capable of cycling at rates over 100 bags per minute, this system was designed to maximize machine uptime while lowering total cost of ownership.

State-of-the-art engineering has led to an innovative, inherently safe design. No light curtains or double palm switches are required to achieve safe operation for hand load operations. This revolutionary new approach provides unobstructed access to the open bag, facilitating faster, more ergonomic loading.


The system features a simple design with very few moving parts, reducing lifetime cost and improving uptime. Servo driven web controls along with job storage capabilities reduce the amount of bags in queue, eliminating waste and decreasing changeover time.

Flexibility has been built into the system, allowing the Autobag 500 to meet the needs of any loading area. Capable of being configured for left or right-hand access to the HMI, cycle switch, and roll loading provides seamless integration into any operation. The system can also be networked for full pack station integration to facilitate central monitoring; and the extraction of productivity information that can be manipulated for detailed analysis.

When used with genuine Autobag pre-opened bags-on-a-roll, the Autobag 500 ushers in the next evolution of high-quality, reliable and flexible bag packaging, backed by the industry's most comprehensive engineering and field service network.

### Markets Served

- Aerospace & Defense
- Apparel & Accessory Packaging
- Automotive
- Electronics
- Hardware & Fasteners
- Healthcare
- Hobby & Craft
- Household Products
- Personal Products
- Pet Products
- Toys



Easily integrates with inline printers, counters, scales, and conveyors for semi- to fully-automatic bagging



Modular components and dedicated service access simplify maintenance and repairs to maximize uptime



AutoTouch™ Control Screen accesses operator tutorials, help system, on-board diagnostics, and performance monitoring



Multi-position unwind with tension control simplify changeover

## Features and Benefits

### More Options

More bag size options; from 2" W x 2.5" L to 12" W x 20" L supported (36" long unsupported)

### Streamlined

Processor controlled servo motors, Ethernet-capable networking, and flexible mechanical design streamline integration

### Compact

Compact footprint minimizes floor space

### Adjustable

Simple height adjustment and casters for operator comfort and portability

### Flexible

Adjustable pass-through up to 5" for maximum flexibility and packaging efficiency



### Largest Supply

We maintain over 100 styles of stock bags and manufacture custom bags that include printing in up to 10 colors and a variety of special features



### Ensures Consistent Quality


Newly designed bag sealer area combined with improved temperature control and optional seal-flatteners ensure consistent, high-quality seals



## Optional Additions

- Range of In-Feed Funnels
- Seal Flatteners
- Raised Unwind
- SimpleCount™ Counting System
- Product Load Tray

## Technical Information

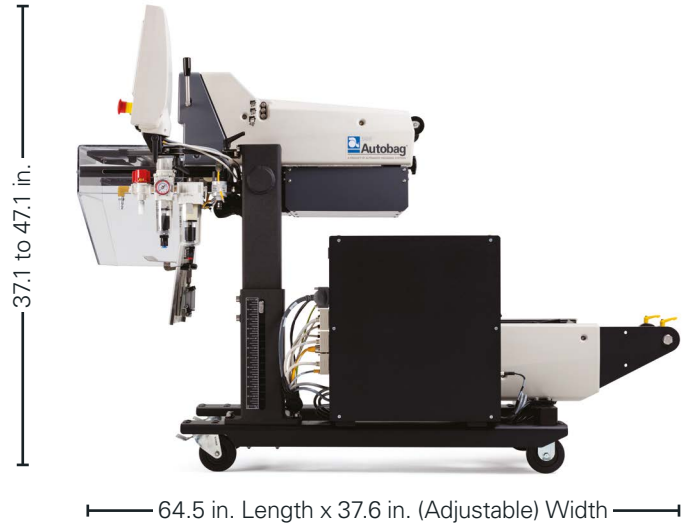

Weight	350 lbs.
Electrical	Universal Input: 110V to 240V VAC, 50/60 Hz Power Consumption: 1500 Watts (VA) max
Air Feed	5 CFM/80 psi of clean, dry air
Pass-Through	5 in. max
Bag Thickness	1.09 – 4.0 mil
Bag Sizes	W 2 to 12 in. L* 2.5 to 20 in. <small>*There are two versions, Long and Short. Long configuration min length is 5 in. Short min length is 2.5 in.</small>
Weight Capacity	Up to 5 lbs. (with load shelf)



**System Matched Bags**



**Service & Support**



**Custom Engineering & Integration**

888-AUTOBAG    info@autobag.com    autobag.com

Automated Packaging Systems Inc. 10175 Philipp Parkway, Streetsboro, Ohio 44241

© May 2017 Automated Packaging Systems. Features, Options & Technical Specifications subject to change. The use of the ® or ™ symbol indicates that Automated Packaging Systems, Inc. has registered or is otherwise claiming trademark rights in the United States. These marks may also be registered in other countries and common law rights may apply in countries where such rights are recognized. 05/17 7.5M

