

Introducing the Autobag® 550™ Bagging System – Next generation bagging that optimizes flexibility for fulfillment, short-run and build-on-demand operations

The Autobag® 550™ bagger is a technologically-advanced, automatic filling and sealing machine designed for reliability, flexibility and optimizing packaging throughput. Capable of cycling at speeds up to 45 bags per minute, this system was designed to maximize machine uptime while lowering total cost of ownership.

Next-bag-out printing is achieved with an advanced thermal transfer imprinter positioned directly over the next bag to be loaded. This ensures accuracy and efficiency in applications that require frequent product and label changeovers, prevents product queuing and eliminates a separate labeling operation.

State-of-the-art engineering has led to an innovative, inherently safe design. No light curtains or double palm switches are required to achieve safe operation for hand load operations. This revolutionary new approach provides unobstructed access to the open bag, facilitating faster, more ergonomic loading.

The system features a simple design with very few moving parts, reducing lifetime cost and improving uptime. Servo driven web controls along with job storage capabilities reduce the amount of bags in queue, eliminating waste and decreasing changeover time.

Flexibility has been built into the system allowing the Autobag 550 to meet the needs of any loading area. Capable of being configured for left or right-hand access to the HMI, cycle switch, roll loading, and ribbon loading provides seamless integration into any operation. The system can also be networked for full pack station integration to facilitate central monitoring; and the extraction of productivity information that can be manipulated for detailed analysis.

When used with genuine Autobag pre-opened bags-on-a-roll, the Autobag 550 ushers in the next evolution of high-quality, reliable and flexible bag packaging, backed by the industry's most comprehensive engineering and field service network.

Markets Served

- Mail Order Fulfillment
- Prescription-by-mail fulfillment
- Catalog Order Fulfillment
- Spare Parts Distribution
- Short-run production with frequent changeovers in any market



Next-bag-out printing prevents product queuing and reduces waste



Multi-position unwind with tension control simplify changeover



AutoTouch™ Control Screen accesses operator tutorials, help system, on-board diagnostics, and performance monitoring



Newly designed bag sealer area combined with improved temperature control and optional seal-flatteners ensure consistent, high-quality seals

Features and Benefits

Streamlined

Processor controlled servo motors, Ethernet-capable networking, and flexible mechanical design streamline integration

More Options

More bag size options; from 2" W x 5" L to 12" W x 20" L supported (36" long unsupported)

Compact

Compact footprint minimizes floor space

Adjustable

Simple height adjustment and casters for operator comfort and portability

Configuration Options

Easily integrates with third-party systems for mail order fulfillment applications



Serviceability

Modular components and dedicated service access simplify maintenance and repairs to maximize uptime



Flexible


Adjustable pass-through up to 5" for maximum flexibility and packaging efficiency



Optional Additions

- Handheld or Tabletop Bar Code Scanner
- Range of In-Feed Funnels
- Seal Flatteners
- Raised Unwind
- SimpleCount™ Counting System

Technical Information

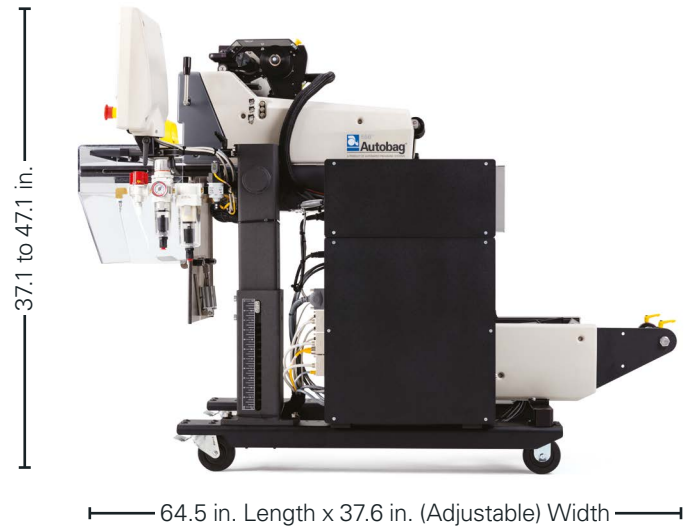

Weight	390 lbs.
Electrical	Universal Input: 110V to 240V VAC, 50/60 Hz Power Consumption: 1500 Watts (VA) max
Air Feed	5 CFM/80 psi of clean, dry air
Pass-Through	5 in. max
Bag Thickness	1.09 – 4.0 mil
Bag Sizes	W 2 to 12 in. L 5 to 20 in.
Weight Capacity	Up to 5 lbs. (with load shelf)



System Matched Bags



Service & Support



Custom Engineering & Integration

888-AUTOBAG info@autobag.com autobag.com

Automated Packaging Systems Inc. 10175 Philipp Parkway, Streetsboro, Ohio 44241

© May 2017 Automated Packaging Systems. Features, Options & Technical Specifications subject to change. The use of the ® or ™ symbol indicates that Automated Packaging Systems, Inc. has registered or is otherwise claiming trademark rights in the United States. These marks may also be registered in other countries and common law rights may apply in countries where such rights are recognized. 05/17 7.5M

